

LOC/DME I-EVW	APP CRS	Rwy Idg	7300
108.9	234°	TDZE	7143
Chan 26		Apt Elev	7143

ILS or LOC/DME RWY 23

EVANSTON-UINTA COUNTY BURNS FIELD (E V W)

⚠


For inoperative MALSR, increase S-LOC 23 Cat D visibility to 1 mile. When local altimeter setting not received, procedure NA.

MALSR

MISSED APPROACH:

Climb to 7600 then climbing left turn to 12000 via EVW VOR/DME R-213 to COOLI/EVW VOR/DME 16.6 DME and hold, continue climb-in-hold to 12000.

ASOS	SALT LAKE CENTER	GCO	UNICOM
120.0	127.7 354.125	121.72	123.0 (CTAF) 0

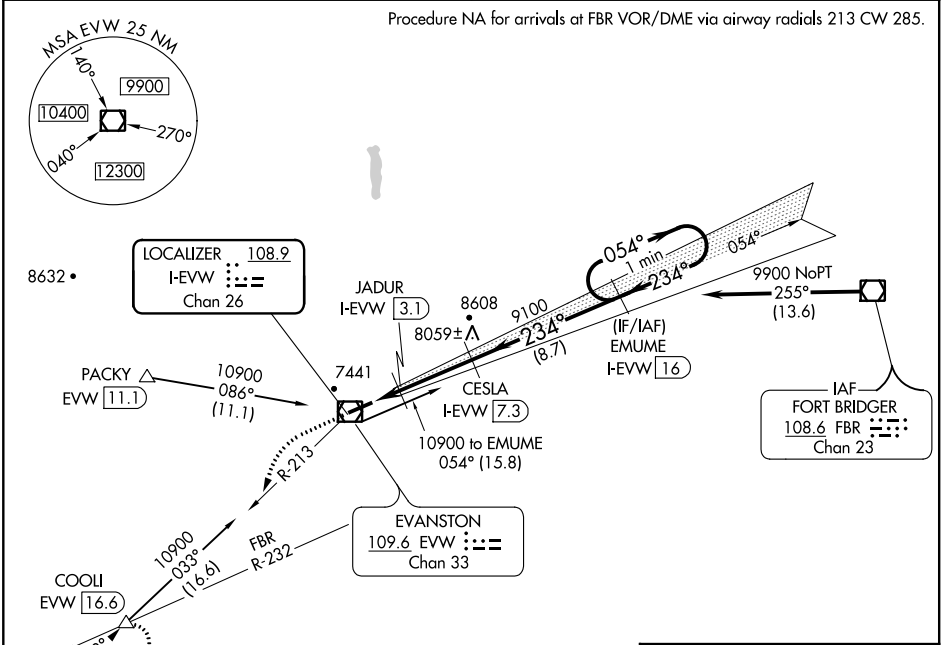

ELEV 7143		TDZE 7143	
7600	12000	Use I-EVW DME when on the localizer course.	
↑	EVW R-213	*LOC only	
COOLI		EMUME I-EVW 16	
JADUR I-EVW 3.1		One Minute Holding Pattern	
I-EVW 2.2		CESLA I-EVW 7.3	
I-EVW 1.4		9100	
7700*		9900	
0.8		GS 3.00° TCH 47	
0.9 NM		234° 5.9 NM from FAF	
4.2 NM		7300 X 100	
8.7 NM		7200	
CATEGORY	A	B	C
S-ILS 23	7343-1/2 200 (200-1/2)		
S-LOC 23	7440-1/2 297 (300-1/2)		
CIRCLING	7580-1 437 (500-1)	7720-1 577 (600-1)	7760-1 3/4 617 (700-1 3/4)
		7760-2 617 (700-2)	
REIL Rwy 5 0			
HIRL Rwy 5-23 0			