
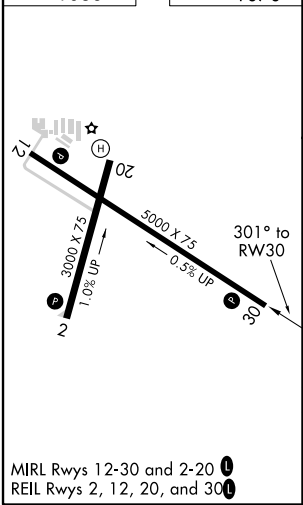


APP CRS	Rwy Idg	5000
301°	TDZE	1070
	Apt Elev	1086

RNAV (GPS) RWY 30

MONROE MUNI (EFT)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albeturs altimeter setting and increase all MDA 100 feet, increase LNAV Cat C/D and Circling Cat C visibility ¼ mile. VDP NA when using Albeturs altimeter setting. Helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climbing left turn to 3000 direct DAVIS and hold.		
AWOS-3 118.375	ROCKFORD APP CON 126.0 327.0	GCO 121.725	UNICOM 123.05 (CTAF) 0

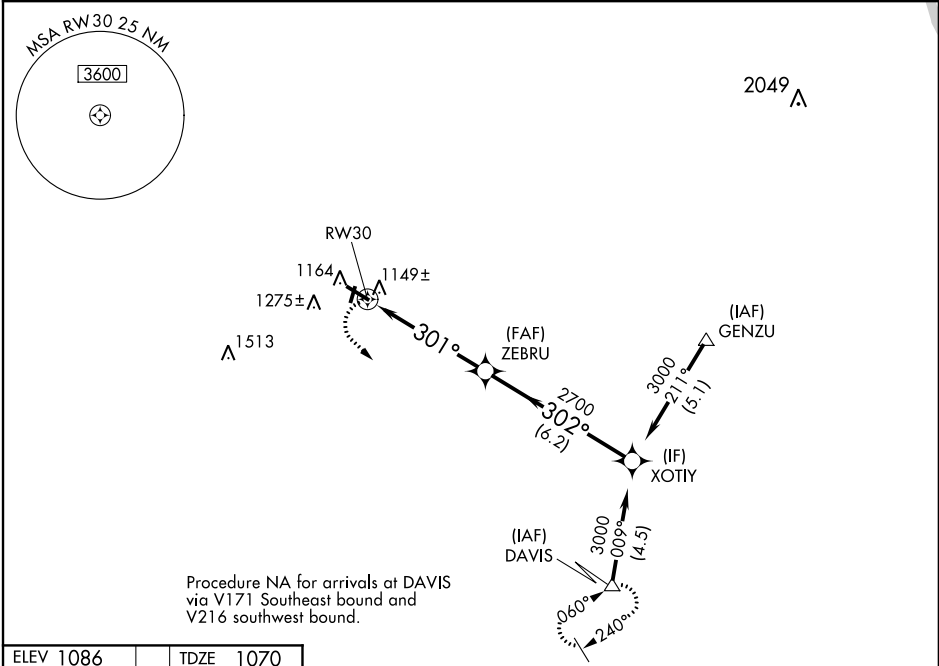

3000	DAVIS △			XOTIY 3000
Procedure Turn NA				
1.2 NM to RW30 301° 3.04° TCH 42 ZEBRU 2700 302° 6.2 NM XOTIY 3000				
CATEGORY	A		B	C
LNAV MDA	1480-1 410 (400-1)		1480-1¼ 410 (400-1¼)	
CIRCLING	1540-1 454 (500-1)	1640-1 554 (600-1)	1640-1½ 554 (600-1½)	1640-2 554 (600-2)