

NOT FOR NAVIGATION

HATTIESBURG, MISSISSIPPI

AL-853 (FAA)

19115



WAAS CH 86720 W13B	APP CRS 132°	Rwy Idg TDZE Apt Elev	5098 151 151
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 13
HATTIESBURG BOBBY L CHAIN MUNI (HBG)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hattiesburg-Laurel Rgnl altimeter setting and increase all DA 51 feet and all MDA 60 feet. Increase LPV all Cats and LNAV Cat C/D visibility 1/8 mile and LNAV/VNAV all Cats and Circling Cat C visibility 1/4 mile. Baro-VNAV and VDP NA when using Hattiesburg-Laurel Rgnl altimeter setting.

MISSED APPROACH: Climbing right turn to 2500 direct HILGA and hold.

ASOS 135.425	HOUSTON CENTER 126.8 327.8	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

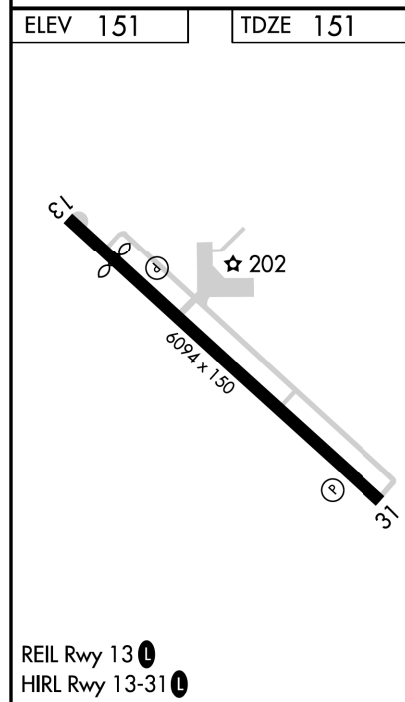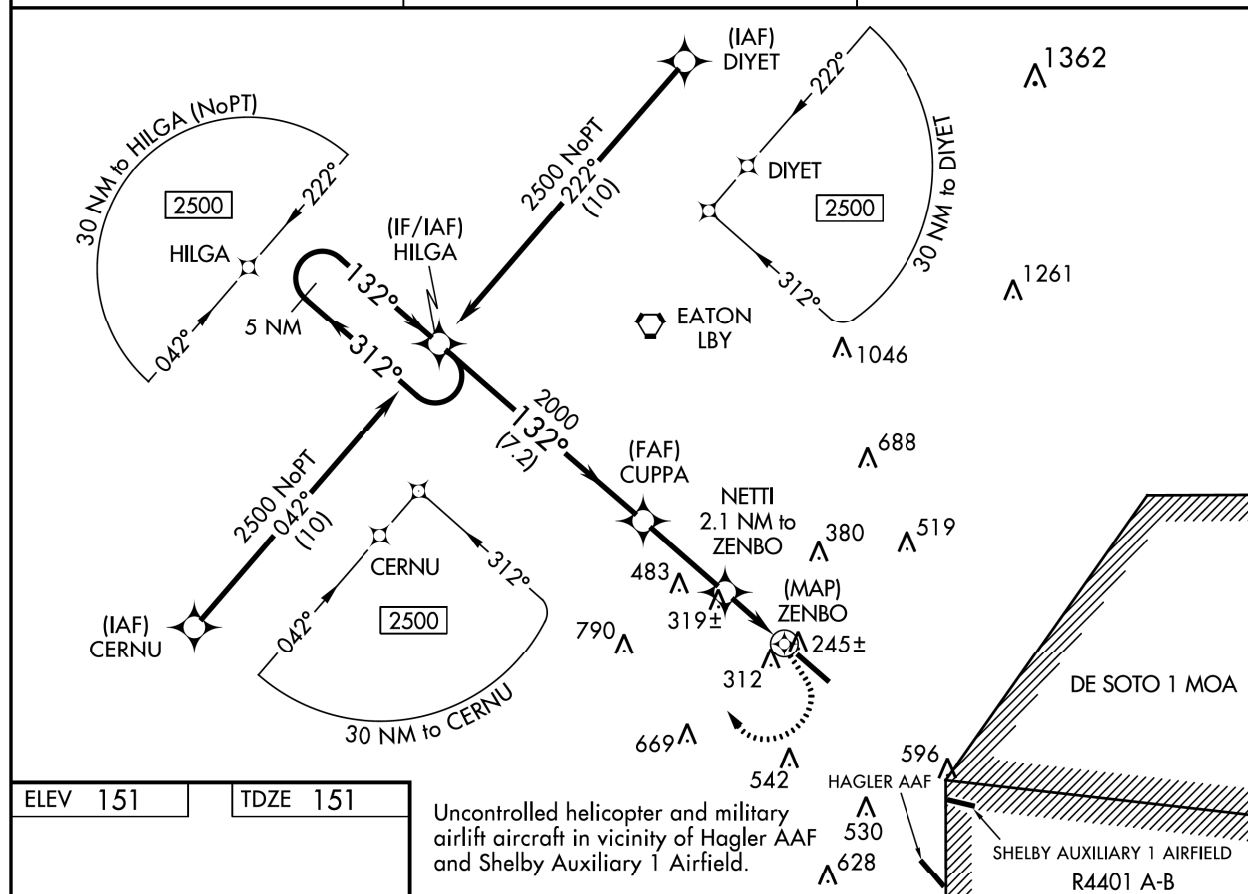

5 NM Holding Pattern	HILGA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).	2500	HILGA
GP 3.00° TCH 40	2500	312°	132°	2000
		7.2 NM	2.9 NM	1.6 NM
				0.5 NM
				0.7 NM
CATEGORY	A	B	C	D
LPV DA	442-1	291 (300-1)		
LNAV/VNAV DA	523-1 1/4	372 (400-1 1/4)		
LNAV MDA	580-1	429 (500-1)	580-1 1/4	429 (500-1 1/4)
CIRCLING	620-1 469 (500-1)	700-1 549 (600-1)	700-1 1/2 549 (600-1 1/2)	720-2 569 (600-2)

HATTIESBURG, MISSISSIPPI
Amdt 2B 23JUN16

HATTIESBURG BOBBY L CHAIN MUNI (HBG)
31° 16' N-89° 15' W
RNAV (GPS) Y RWY 13

SC-4, 22 APR 2021 to 20 MAY 2021